

## SWL SERIES - **SWL750**

### SWL Valve Regulated Lead-Acid Batteries (VRLA)


The SWL range is an enhanced NPL design resulting in an improved energy to density ratio, giving up to 40% extra discharge capacity. All other attributes and operational characteristics are the same, thereby maintaining the benefit of a common mechanical and electrical design for users of both products.



### FEATURES


- Yuasa VRLA batteries can be used in any orientation excluding continuous use inverted.
- Standard case material is flame retardant to (UL94) HBØ.
- FR option case material is flame retardant to UL94:VØ (oxygen index 30).
- SWL batteries are manufactured in factories that comply with ISO9001:2000.
- FR option SWL's comply with BS6290 Part 4 (1997).
- SWL batteries comply with IEC 60896-21+22.

### Layout

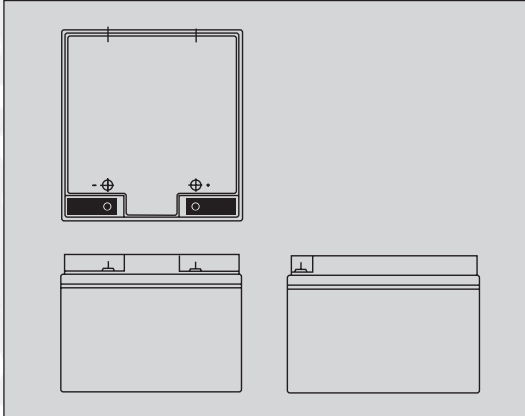

### Terminals (mm)

Terminal	X	Y	L
B	17mm	M5	10



### General Specifications

Specifications	SWL750
1) Nominal Voltage	12
2) Nominal Wattage/Cell	
10 min to 1.6V/Cell	128
5 min to 1.6V/Cell	196
3 min to 1.6V/Cell	239
3) Weight (Approx)/Kg	9.3
4) Energy Density (Wh/L)	88
5) Specific Energy (Wh.kg) 10HR	36
6) Internal Resistance (Approx)/mohm	8.5
7) Maximum (1 min) discharge Current/A	150
8) Maximum Short Duration (1 sec) Discharge Current in Amperes	500
9) Operating Temperatures/°C	
Charge	-15 to 50
Discharge	-20 to 60
10) Percentage Charge Retention at 20°C	
1 month	97
3 months	91
6 months	85
11) Standard Terminal Type	I Type Zn alloy casting B
12) Torque Nm	2.45
13) Case Material	ABS
<b>Dimensions / mm</b>	
Length +/-1	166
Width +/-1	175
Height +/-2	125

